

Blagoflex-High pressure ball valves

Blago connection at both ends

Body in block form, steel (or wrought steel) burnished black, steel cone, hardened and hard chromium plated, direct flow stainless steel control shaft, Delrin sealing discs, sealing on both sides, spindle sealed by Perbunan O-ring, wrought steel control handle, crooked, red stove enamelled finish. Steel ports, galvanized and yellow chromatised. The specified nominal pressures relate to cocks with Delrin seals.

Application


Delrin seals for mineral and organic oils, water, air and similar mediums, for temperatures from -20°C to $+100^{\circ}\text{C}$; cocks with **Teflon** or **Viton** seals are available for other mediums and for temperatures up to 260°C .

The spanner is normally included in the scope of supply!

Dimensions and weights indicated are not binding. Subject to technical modifications in the course of further development.

On request also available with NPT — or Imperial thread.

series	ND kp/cm ²	NW	outer thread D	tube out ∅ mm	length of thread	Fabr. length	l Length handle	H Fabr. height	h height casing	b Fabr. width	sw	weight kg/ each	Blago- No.
Light series Blago cone	600	4	M 12x1,5	6	10	67	85	27	28	24	8	0,25	HOKU-L 6
	600	6	M 14x1,5	8	10	67	85	27	28	24	8	0,25	HOKU-L 8
	500	8	M 16x1,5	10	11	74	110	35	33	30	9	0,40	HOKU-L 10
	500	10	M 18x1,5	12	11	74	110	35	33	30	9	0,40	HOKU-L 12
	500	13	M 22x1,5	15	12	82	135	40	40	35	11	0,65	HOKU-L 15
	400	16	M 26x1,5	18	12	82	135	40	40	35	11	0,65	HOKU-L 18
	300	20	M 30x2	22	14	101	190	52	50	45	12	1,10	HOKU-L 22
	300	25	M 36x2	28	14	108	190	60	56	55	12	1,65	HOKU-L 28
	250	32	M 52x2	42	16	158	260	65	80	70	17	3,30	HOKU-L 42
	heavy series Blago-cone	600	4	M 16x1,5	8	12	73	85	27	28	24	8	0,25
600		6	M 18x1,5	10	12	73	85	27	28	24	8	0,25	HOKU-S 10
500		8	M 20x1,5	12	12	76	110	35	33	30	9	0,40	HOKU-S 12
500		10	M 22x1,5	14	14	80	110	35	33	30	9	0,40	HOKU-S 14
500		13	M 24x1,5	16	14	85	135	40	40	35	11	0,65	HOKU-S 16
400		16	M 30x2	20	16	90	135	40	40	35	11	0,65	HOKU-S 20
300		20	M 36x2	25	18	109	190	52	50	45	12	1,10	HOKU-S 25
300		25	M 42x2	30	20	120	190	60	56	55	12	1,65	HOKU-S 30
250		32	M 52x2	38	22	150	260	65	80	70	17	3,40	HOKU-S 38

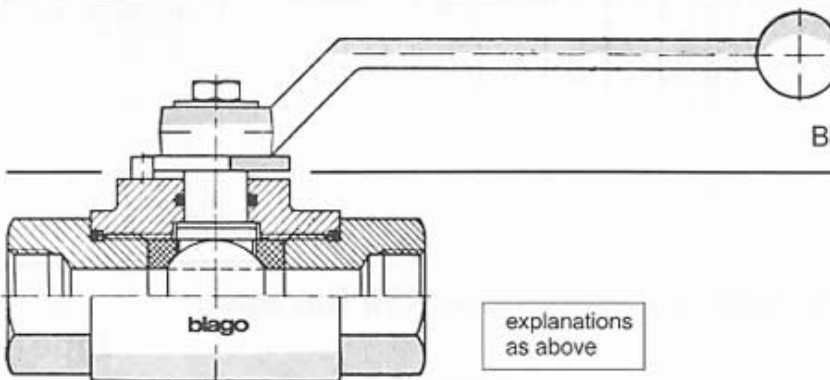

Blagoflex-High pressure ball valves

Blago BSP inside connection at both ends

ND kp/cm ²	NW	inner thread	depth of thread	L Fabr. length	l length handle	H Fabr. height	h height casing	b Fabr. width	sw	weight kg/ each	Blago- No.
600	4	R 1/8"	12	69	85	27	28	24	8	0,25	HOKU-1/8
600	6	R 1/4"	12	69	85	27	28	24	8	0,25	HOKU-1/4
500	10	R 3/8"	14	74	110	35	33	30	9	0,40	HOKU-3/8
500	13	R 1/2"	14	85	135	40	40	35	11	0,65	HOKU-1/2
400	16	R 5/8"	16	85	135	40	40	35	11	0,65	HOKU-5/8
300	20	R 3/4"	18	109	190	52	50	45	12	1,10	HOKU-3/4
300	25	R 1"	20	120	190	60	56	55	12	1,65	HOKU-1"
250	32	R 1 1/4"	22	135	260	65	80	70	17	3,40	HOKU-1 1/4
250	32	R 1 1/2"	24	135	260	65	80	70	17	3,40	HOKU-1 1/2