


RTD ASSEMBLY WITH ADJUSTABLE THREADED CONNECTION // RTD4

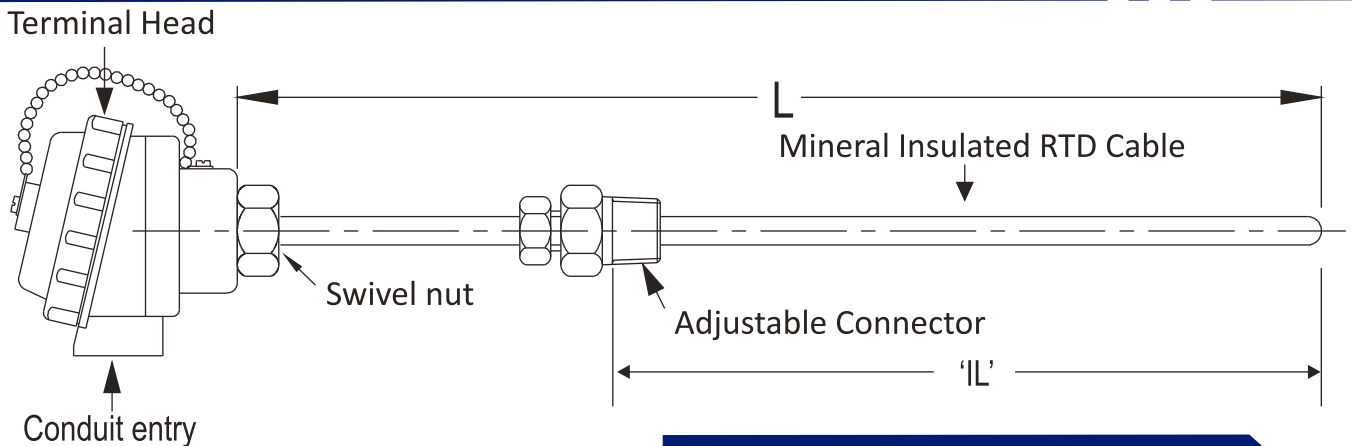

Special Features :

- ★ Mineral insulation.
- ★ Spring loaded design for positive contact with thermowell
- ★ Available in all sheath diameters
- ★ Mineral insulation enables flexibility and Durability.
- ★ Enclosures in all material - Die cast Aluminium / Cast Iron / SS 304 / SS 316
- ★ Enclosures in all categories (Weatherproof, IP-65 to IP-68, Flameproof Gr. IIA IIB and Explosionproof, Gr. IIA, IIB, IIC for H₂ service application.)

How to Order:

Code	No of Element
S	Simplex
D	Duplex

1

Code	Element Type
Pt -100	Pt - 100 RTD
Pt - 500	Pt - 500 RTD
Pt - 1000	Pt - 1000 RTD
Cu - 53	Cu - 53

2

Code	Range
DST	-200°C till 449°C
NST	450°C till 600°C

3

Code	Accuracy
A	Class 'A' Tolerance as per IEC - 751
B	Class 'B' Tolerance as per IEC - 751

4

Code	Wire Configuration
2W	2 Wire System
3W	3 Wire System
4W	4 Wire System

5

Application :

Such design is generally used in all industries, machinery manufactures, bearing temp measurement etc.

Standard Product details :

No of element	Simplex
Element type	Pt - 100 RTD
Range	-200°C till 449°C
Accuracy	Class 'B' Tolerance as per IEC - 751
Wire Configuration	3 Wire System
Sheath Diameter	6.0 mm
Sheath Material	SS 316
Terminal Head Type	Screwed type, weatherproof, IP-65 in die-cast Aluminium
No. Of Conduit Entry/Entries-	One
Conduit Entry Size	3/4" ET(F)
Head Extension Type	Adjustable Threaded Connection
Immersion Length 'IL'/	
Element Length 'L'mm	L = 300 mm.
Process conn. "P"	½"NPT(M)
Option Description	S.C. cable gland in nickel plated brass

Code	Sheath Diameter
3	3.0 mm
3/ 2.8	3.0/ 2.8 mm*
6	6.0 mm
6/ 5	6.0/ 5.0 mm*
8	8.0 mm
8/ 5	8.0/ 5.0 mm*

Consult factory for other diameter.
* RTD Element will be enclosed in Ø3.0 mm SS 316 sheath & Extended by Ø2.8 mm Mineral Insulated lead out cable.

6

Code	Sheath Material
316	SS 316

7

Code	Terminal Head Type
SWP	Screwed type, weatherproof, IP-65 in die-cast Aluminium
SFP	Screwed type, flamerproof Gr. IIA IIB in die-cast Aluminium
SEP	Screwed type, explosionproof Gr.IIC in die-cast Aluminium
HWP	Hinged type, weatherproof, IP-65 in die-cast Aluminium
JWP	Junction box, weatherproof, IP-65 in die-cast Aluminium
JFP	Junction box, flamerproof Gr. IIA IIB in die-cast Aluminium
JEP	Junction box, explosionproof Gr.IIC in die-cast Aluminium
BWP	Weatherproof Head, IP-65 in die-cast Aluminium with cover fitted with two screws.

8

Code	No. Of Conduit Entry/Entries
1	One
2	Two
	Other, Please Specify

9

Code	Conduit Entry Size
A	3/4" ET(F)
B	1/2"NPT(F)
C	3/4"NPT(F)
	Other, Please Specify

10

Code	Head Extension Type
AC	Adjustable Threaded Connection

11

Code	Immersion Length 'IL' / Element Length 'L' mm
	Specify in mm.

12

Code	Process conn. "P"
15N	1/2"NPT(M)
15B	1/2" BSP(M)
20N	3/4"NPT(M)
20B	3/4" BSP(M)
	Other, Please Specify

13

Code	Option Description
0	None
3	Terminal head in SS 304
4	Terminal head in SS 316
5	Terminal head in Cast Iron
6	S.C. cable gland in nickel plated brass
7	D.C. cable gland in nickel plated brass
8	S.C. cable gland in SS 304
9	D.C. cable gland in SS 304
11	S.C. cable gland in SS 316
12	D.C. cable gland in SS 316
13	Head mounted temp. transmitter
14	S.S. base plate suitable for Temperature Transmitter mounting
16	Head Extension in SS 304.
17	Head Extension in SS 316.
20	Plug for conduit entry in Carbon Steel [ASTM A105]
21	Plug for conduit entry in SS 304
22	Plug for conduit entry in SS 316
23	Plug for conduit entry in Aluminium
PW	Five Point Factory Calibration Certificate
SX	SS Tag Plate

14

Note :

- When selecting option "PW", please also specify measuring temperature range.(For e.g. 0/300°C)
- Explanations of Abbreviations used:

SC = Single Compression
DC = Double Compression
SS = Stainless Steel

(Ordering Example)

RTD4	1	(Pt-100)	DST	B	3W	6	316	SWP	1	A	AC	L = 300	A	6
	1	2	3	4	5	6	7	8	9	10	11	12	13	14

Distributor



KB&T
KB& TRADERS

79/1, APS Complex, Iduvampalayam Road,
Periyandipalayam Tiruppur-641687, India
Mobile: 90477 77573, Tel : 0421 4955647
Email: sales@kbandtraders.com.
Web: www.kbandtraders.com

DELTA[®]