


BEARING TEMPERATURE RTD

RTD8

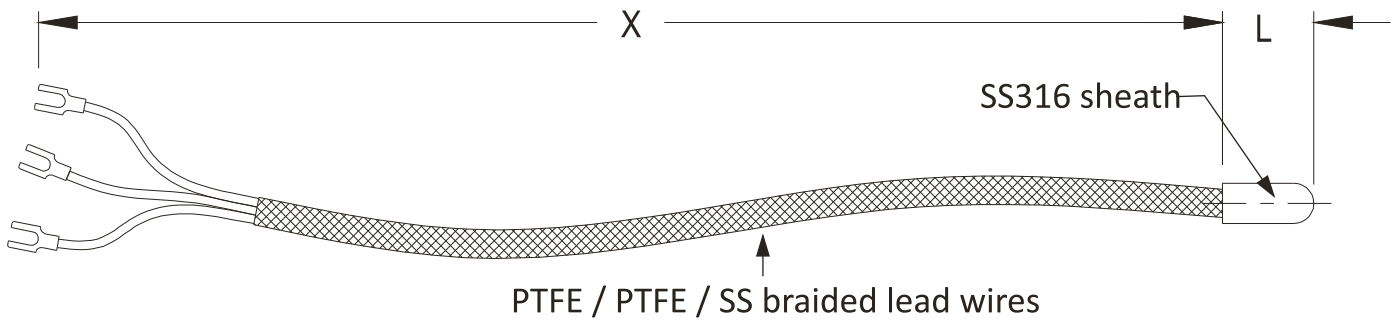

Reference standard :- IEC - 751.

How to Order:

Code	No of Element
S	Simplex
D	Duplex

1

Code	Element Type
Pt-100	Pt - 100 RTD
Pt- 500	Pt - 500 RTD
Pt - 1000	Pt - 1000 RTD
Cu - 53	Cu - 53

2

Code	Range
FLM	-200°C till 449°C
CMC	450°C till 600°C

3

Code	Accuracy
A	Class 'A' Tolerance as per IEC - 751
B	Class 'B' Tolerance as per IEC - 751

4

Code	Wire Configuration
2W	2 Wire System
3W	3 Wire System
4W	4 Wire System

5

Code	Sheath Diameter
3	3.0 mm
6	6.0 mm
8	8.0 mm
Consult factory for other diameter.	

6

Code	Sheath Material
S6	SS 316

7

Code	Element Length "L" mm
	Specify in mm.

8

Code	Lead Wire Length "X" mm
	Specify in mm.

9

Application :

Used as a spare or replacement RTD element in existing RTD assembly

Standard Product details :

No of element	Simplex
Element type	Pt - 100 RTD
Range	-200°C till 449°C
Accuracy	Class 'B' Tolerance as per IEC - 751
Wire Configuration	3 Wire System
Sheath Diameter	3.0 mm
Sheath Material	SS 316
Element Length "L" mm	25 mm.
Lead Wire Length "X" mm	3000 mm.
Lead Wire Type	PTFE / PTFE / SS Wire braided lead Wires.

Special Features :

- ★ Available in all sheath diameters
- ★ Lead wires of your choice.

Code	Lead Wire Type
1	PTFE insulated lead wires.
2	PTFE / PTFE insulated lead wires.
3	PTFE / PTFE / SS braided lead wires.

10

Code	Option Description
PW	Five Point Factory Calibration Certificate
SX	SS Tag Plate

11

Note :

1. When selecting option "PW", please also specify measuring temperature range.(For e.g. 0/300°C)

(Ordering Example)

RTD8	S	(Pt-100)	DST	B	3W	3	S6	25	3000	3	SX
	1	2	3	4	5	6	7	8	9	10	11

Distributor



KB& TRADERS

79/1, APS Complex, Iduvampalayam Road,
Periyandipalayam Tiruppur-641687, India
Mobile: 90477 77573, Tel : 0421 4955647
Email: sales@kbandtraders.com.
Web: www.kbandtraders.com